



Scalloped Gun System, 3-3/8" O.D. 6 spf, 60° Spiral System, Big Hole


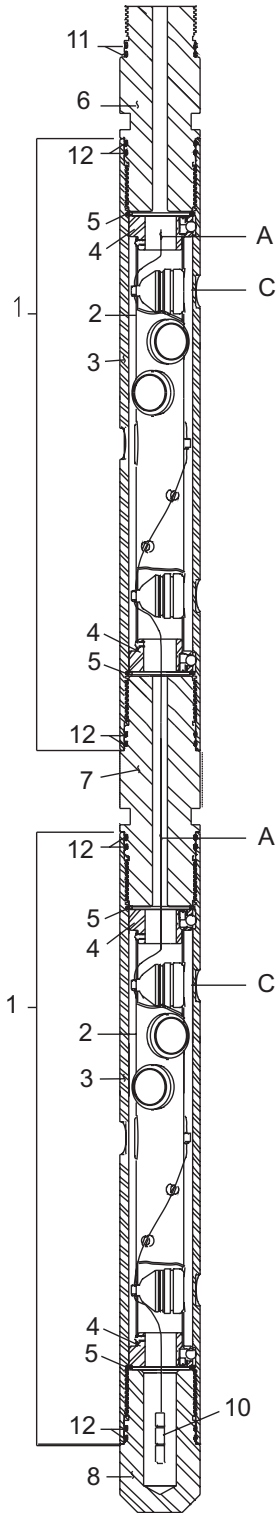


ITEM	PART NO.	DESCRIPTION
1	S33-0614-A21F	Shipping Assembly, 3-3/8" x 21', 6 spf, 60° Spiral
	S33-0614-A15F	Shipping Assembly, 3-3/8" x 15', 6 spf, 60° Spiral
	S33-0614-A11F	Shipping Assembly, 3-3/8" x 11', 6 spf, 60° Spiral
	S33-0614-A07F	Shipping Assembly, 3-3/8" x 7', 6 spf, 60° Spiral
	S33-0614-A04F	Shipping Assembly, 3-3/8" x 4', 6 spf, 60° Spiral
2	T20-0614-A21F	Tube Strip, 21', 6 spf, 60° Spiral
	T20-0614-A15F	Tube Strip, 15', 6 spf, 60° Spiral
	T20-0614-A11F	Tube Strip, 11', 6 spf, 60° Spiral
	T20-0614-A07F	Tube Strip, 7', 6 spf, 60° Spiral
	T20-0614-A04F	Tube Strip, 4', 6 spf, 60° Spiral
3	TAG-3375-101	Carrier 3-3/8" x 21', 6 spf, 60° Spiral
	TAG-3375-099	Carrier 3-3/8" x 15', 6 spf, 60° Spiral
	TAG-3375-098	Carrier 3-3/8" x 11', 6 spf, 60° Spiral
	TAG-3375-097	Carrier 3-3/8" x 7', 6 spf, 60° Spiral
	TAG-3375-096	Carrier 3-3/8" x 4', 6 spf, 60° Spiral
4	TAG-3375-274U	End Plate Universal (1)
	TAG-3375-274UP	End Plate Universal w/pin (1)
5	TAG-3375-076	Carrier Snap Ring (N-5000-262) (2)
6	TAG-3375-280	Top Sub 3-3/8" Adapts to TCP or Wireline Systems
7	TAG-3375-281	Tandem Sub 3-3/8"
8	TAG-3375-078	Bull Plug 3-3/8"
	TAG-3375-078S	Bull Plug 3-3/8" w/2-3/8" EUE pin on bottom
-	TAG-0100-275 TAG-0100-040	Booster Transfer Kit, Universal -3-1/3, 3-3/8 & 4" TAG Insert (Included w/Transfer Kit) see page con-1.0
10	DET-0010-001	Detonating Cord End Cover
11	OOO-N569-230	O-Ring, #230, 90 Duro Nitrile -see ref. section
	OOO-V569-230	O-Ring, #230, 90 Duro Viton -see ref. section
12	OOO-N569-231	O-Ring, #231, 90 Duro Nitrile -see ref. section
	OOO-V569-231	O-Ring, #231, 90 Duro Viton -see ref. section
A	A578010	Detonating Cord, 80 gr., RDX, LS -see ref. section
	A571010	Detonating Cord, 80 gr., HMX, LS -see ref. section
-	DET-3050-429	Bi-Directional Booster
C	TAG-5000-306	Charge, RDX, BH
	TAG-5000-306ZF	Charge, RDX, BH -Phantom™
	TAG-5000-406	Charge, HMX, BH
	TAG-5000-406Z	Charge, HMX, BH
	TAG-5000-406ZF	Charge, HMX, BH
	TAG-4500-117	Blank Charge Case (non explosive)

Scalloped Gun System, 3-3/8" O.D. 6 spf, 60° Spiral System, Big Hole



SPECIFICATIONS		
PRESSURE RATING	144.8 Mpa	21,000 psi
TEMPERATURE	UP TO 260°C	UP TO 500°F
TENSILE STRENGTH	125 000 daN	285,000 lbs
CARRIER THREAD	2-13/16" - 6 ACME	
GUN WEIGHT LOADED	22.0 kg/m	15.0 lb/ft
TORSIONAL YIELD	8 000 N•m	5,900 lb-ft

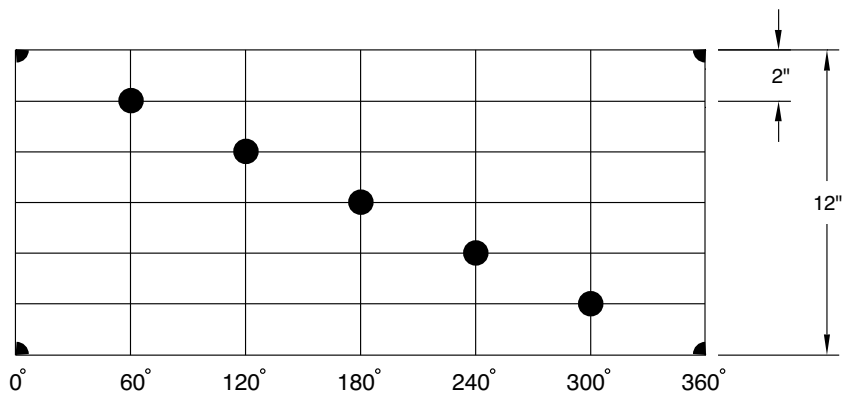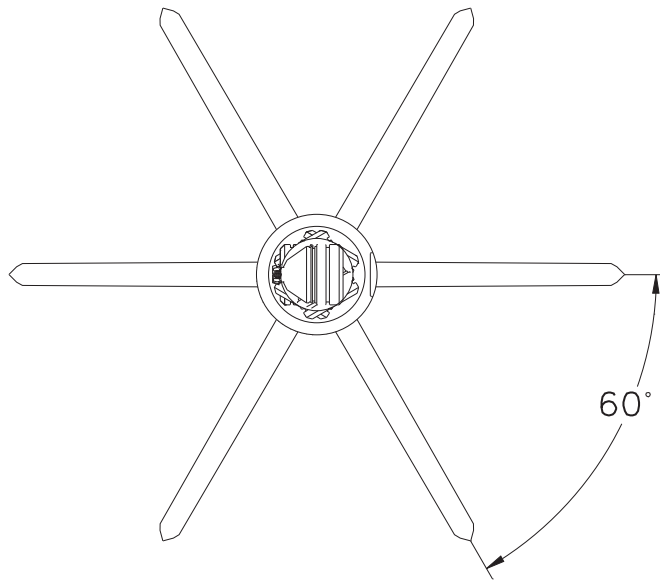

Note: Guns are available in standard lengths from 2 through 21 ft.

Gun lengths in increments of 0.5 ft are available by special order only.

Charges and ancillary components for higher temperature applications are available by Special Order.

sgs_S33-0614-A R02