

# Compensated Neutron Logging Tool (CNLT)

The Compensated Neutron Logging Tool (CNLT) provides one of the primary porosity measurements used for hydrocarbon saturation calculations. When combined with other standard petrophysical measurements it also provides lithology indication—shale volume and formation gas identification.

## DESCRIPTION


The instrument includes an AmBe neutron source and dual thermal neutron detectors, providing a neutron porosity measurement which is compensated for borehole size and other environmental conditions.

## APPLICATIONS


- Identification of formation porosity
- Gas detection and shale identification in combination with density tools

## FEATURES

- Combinable with other Gallop tools
- Operates in both Open and Cased hole environments
- Compensated for borehole conditions, casing and cement corrections
- Determines porosity and lithology in zones of interest in combination with other porosity logs

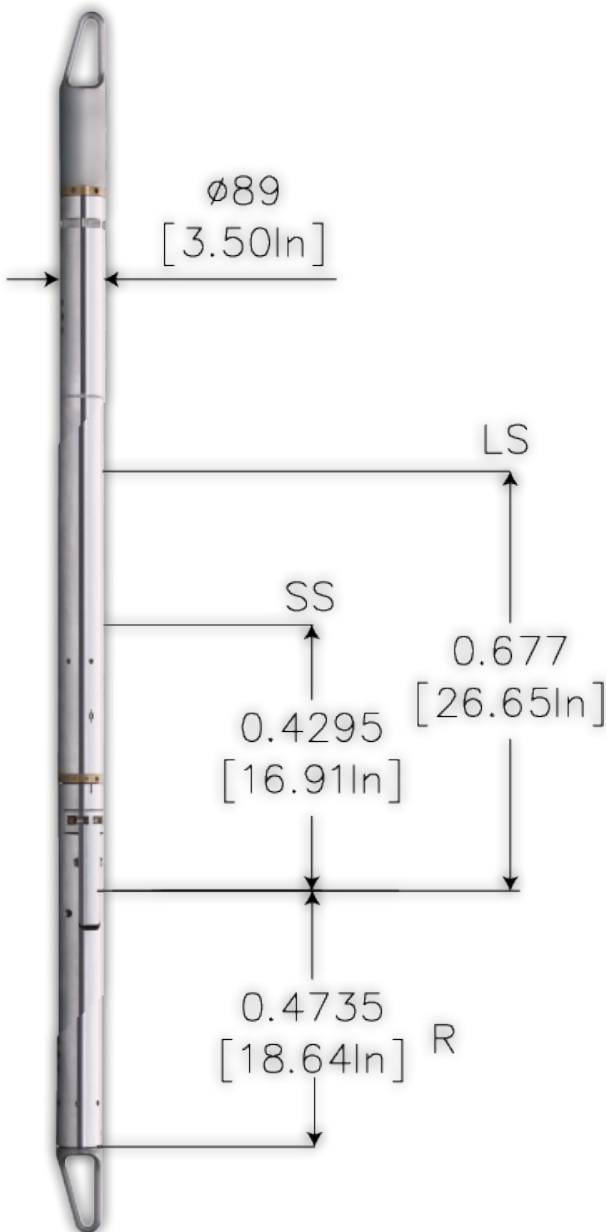

CNLT

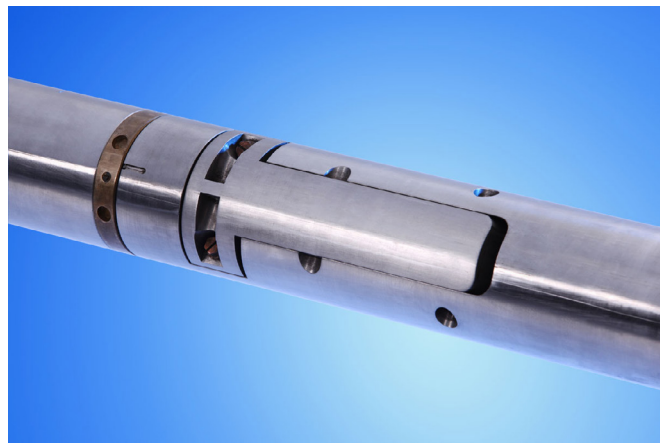

# SPECIFICATIONS

## CNLT - Compensated Neutron Logging Tool

### General Specs

Maximum Pressure	20,305 PSI (140 Mpa)
Maximum Temperature	350 °F (175°C)
Maximum Hole Size	20 in. (508 mm)
Minimum Hole Size	4.5 in. (114.3 mm)
Diameter	3.5 in. (88.9 mm)
Length	250.8 in. (6400 mm)
Weight	110 lbs (50 kg)
Max. Logging Speed	30 ft/min (540 m/h)

### Borehole Conditions

Borehole Fluids	Any
Tool Position	Eccentralized

### Hardware Features

Voltage	220 Vac, 50 Hz
Current	50 mA
Source Type	5.92 x10 <sup>11</sup> Bq (16 curie) neutron source
Sampling Rate	10, 20, 40 samples/m selectable
Sensor Type	He3 tube

### Measurement

Principle	Nuclear
Minimum	0 Pu
Maximum	85 Pu
Vertical Resolution	35 in. (88.9 cm)
Depth of Investigation	6 in. (15.2 cm) (Depending on H index)
Accuracy	0-10 Pu ± 1Pu 10-30 Pu : ±2% 0-45 Pu ±5%
Primary Curves	Limestone, sandstone, dolomity porosity

\*Specifications are subject to change as tools are constantly being improved